


Melvin



single-speed vertical dropout chain tensioner

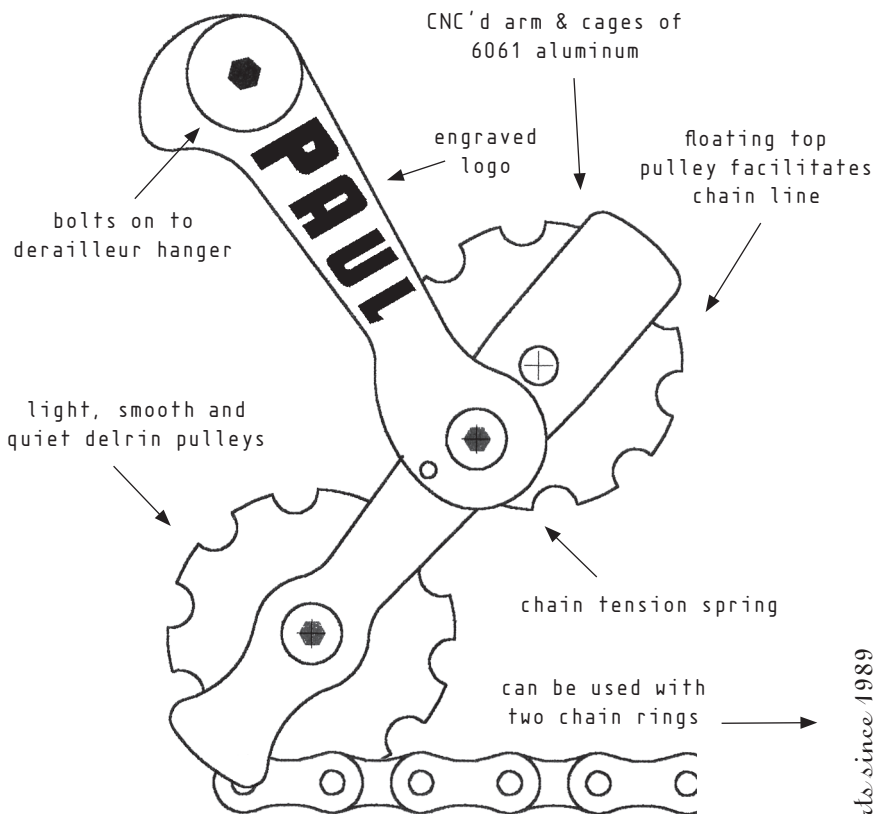

made in USA

Nice parts since 1989

INSTALLING THE *Melvin*:

PLEASE READ CAREFULLY

IMPORTANT: This product is designed for use with the PAUL WORD™ rear hub. It may or may not line up chain with another brand of hub.

1. Use spacers on mount bolt to line up jockey pulleys with cog.
2. Install on drop-out hanger.
3. Break chain and thread through cage and over pulleys as you would with a derailleur.
4. Chain length is correct when cage points approximately straight down. Check for stiff links after re-connecting the chain.
 - 4a. For bikes with two front chain rings, cage should be in an approximately straight up and down position in the smaller of the two chain rings.



PAUL Component Engineering
www.paulcomp.com