




Email: info@paulcomp.com

Phone: 530-345-4371

11204 Midway

Chico, California 95928

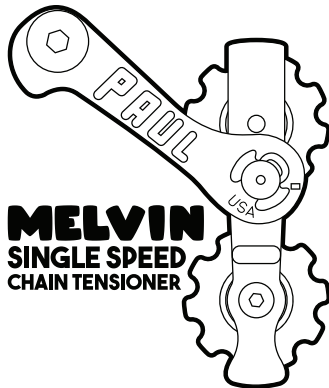

The chainline of the Melvin is adjustable from 20mm - 26mm.
Measure from the outside face of the derailleur hanger.

Installation

- 1. Test fit the Melvin against the derailleur hanger. If needed remove the cir-clip and rearrange the derailleur bolt spacers to align the pulleys under the cog.**
- 2. Mount to derailleur hanger using a 5mm wrench.**
- 3. Install the chain through the cage and pulleys like a traditional rear derailleur.**
- 4. Chain length is correct when the pulleys are vertically aligned.**

For bikes with multiple front chain rings, the pulleys should be vertically aligned when the chain is on the smallest chain ring.